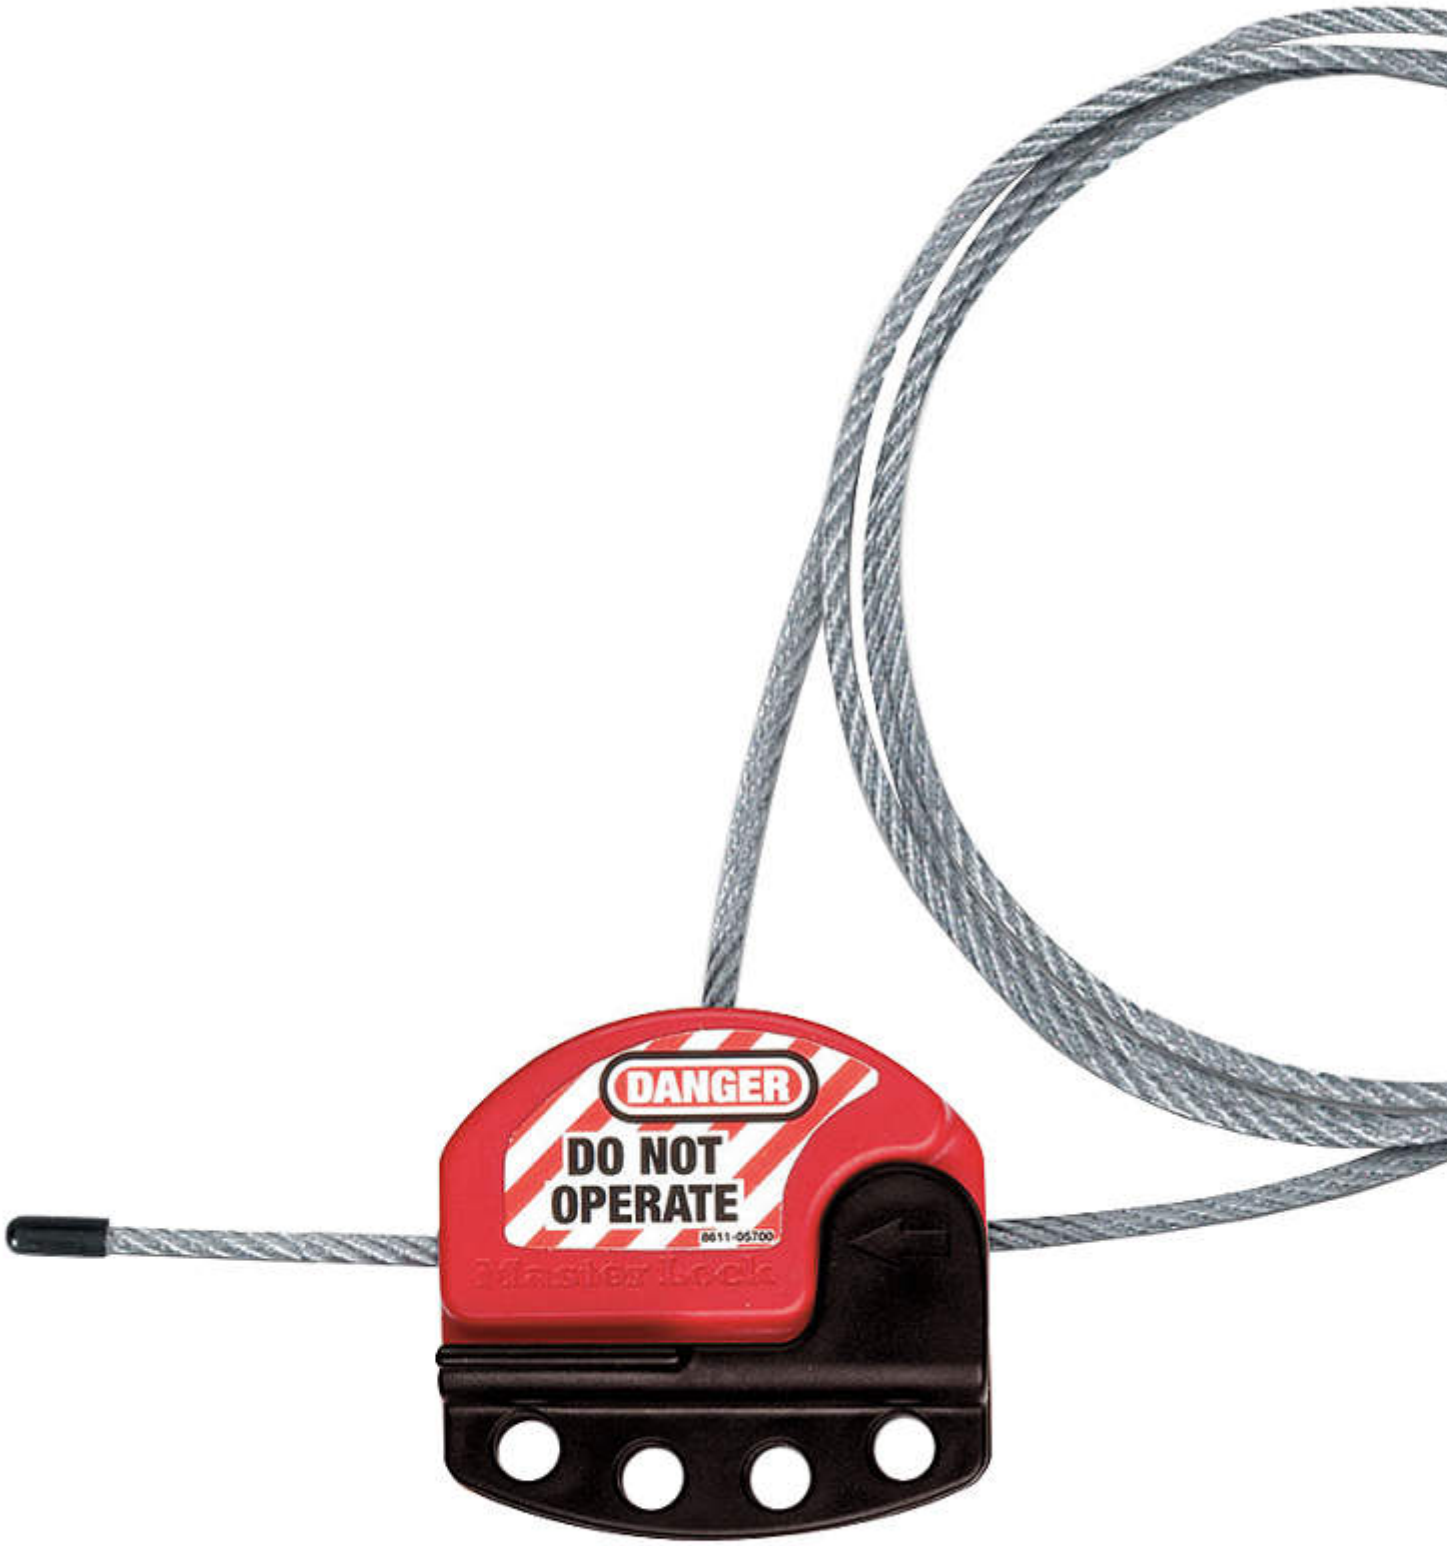
Mc MINING
GROUPE PICHORI
Quality First

LEADER IN INDUSTRIAL TOOLS & EQUIPMENT

Technical sheet


DANGER
DO NOT
OPERATE
8611-05700
Master Lock

Features and benefits	
Patented 5/32" (4mm) diameter x 6\' (1.83m) pull-tight cable adjusts for a secure fit every time. - Also available from 2 to 50 foot (61cm to 15.2m) long. - Integrated safety hasp and cable is ideal for multiple circuit breaker panel and side-by-side gate valve lockouts - Tough, flexible multi-stranded steel cable is insulated with a clear plastic coating (PVC free) - Feed the cable end through the points to be locked out, then back through the lockout body - Cinch it tight to remove any slack with the patented locking feature - Tough, lightweight thermoplastic body withstands chemicals - Performs effectively in extreme conditions (–50° F to +300° F (-46°C to 149°C)) - Includes high-visibility, re-usable, write-on safety labels (English, French & Spanish) - Identify the responsible person, then erase for the next job	
Specifications	
Item	Adjustable Cable Lockout
- Cable Length	6 ft.
- Color	Red/Silver
- Max. Number of Padlocks	4
- Padlock Shackle Max. Dia.	9/32"
- Cable Dia.	3/16"
- Cable Material	Plastic Coated Steel
- Body Material	Thermoplastic
- Body Dimensions	1-19/50"D x 1-19/50"H x 8"L x 8"W
- Legend	Danger Do Not Operate
For Use	WithLockout Padlocks, Safety Padlocks
- Standards	OSHA 1910.147