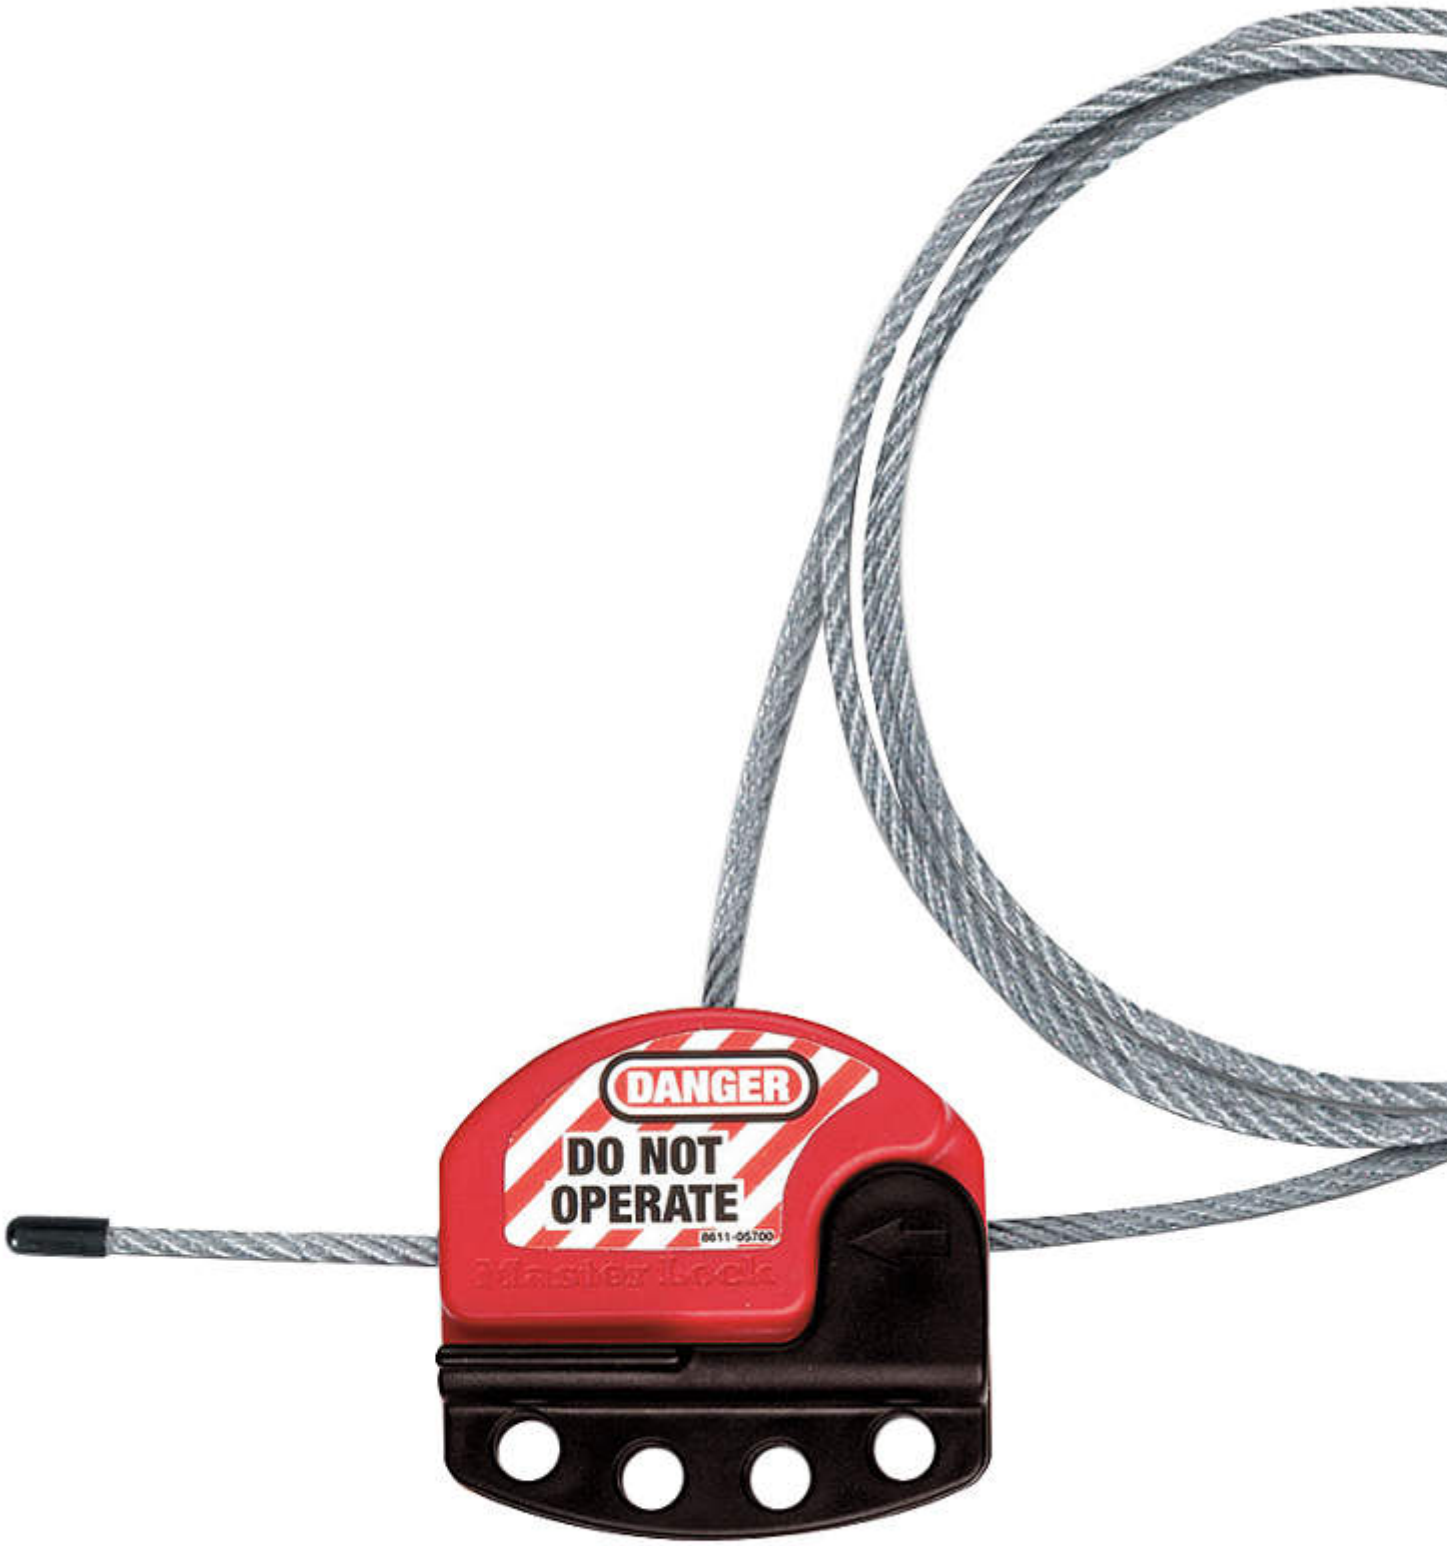
Mc MINING
GROUPE PICHORI
Quality First

LEADER IN INDUSTRIAL TOOLS & EQUIPMENT

Technical sheet


DANGER
DO NOT
OPERATE
8611-05700
Master Lock

Features and benefits	
Cinch it tight to remove any slack with the patented locking feature - Performs effectively in extreme conditions (–50° F to +300° F (-46°C to 149°C)) - Includes high-visibility, re-usable, write-on safety labels (English, French & Spanish) - Patented 5/32" (4mm) diameter x 6\' (1.83m) pull-tight cable adjusts for a secure fit every time. - Integrated safety hasp and cable is ideal for multiple circuit breaker panel and side-by-side gate valve lockouts - Tough, flexible multi-stranded steel cable is insulated with a clear plastic coating (PVC free) - Feed the cable end through the points to be locked out, then back through the lockout body - Tough, lightweight thermoplastic body withstands chemicals Identify the responsible person, then erase for the next job - Legend Danger Do Not Operate - For Use WithLockout Padlocks, Safety Padlocks - StandardsOSHA 1910.147	
Specifications	
Item	Adjustable Cable Lockout
Cable Length	12 ft.
Color	Red/Silver
Max. Number of Padlocks	4
Padlock Shackle Max. Dia.	9/32"
Cable Dia.	3/16"
Cable Material	Plastic Coated Steel
Body Material	Thermoplastic
Legend	Danger Do Not Operate
For Use With	Lockout Padlocks, Safety Padlocks
Standards	OSHA 1910.147